

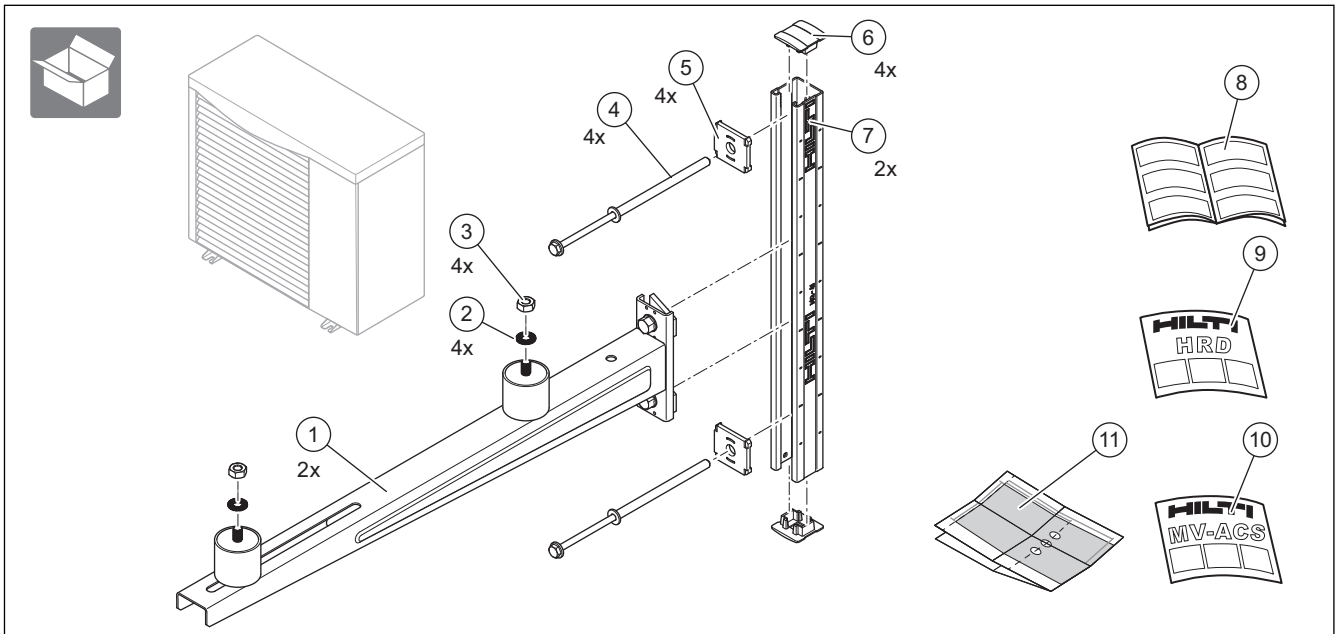
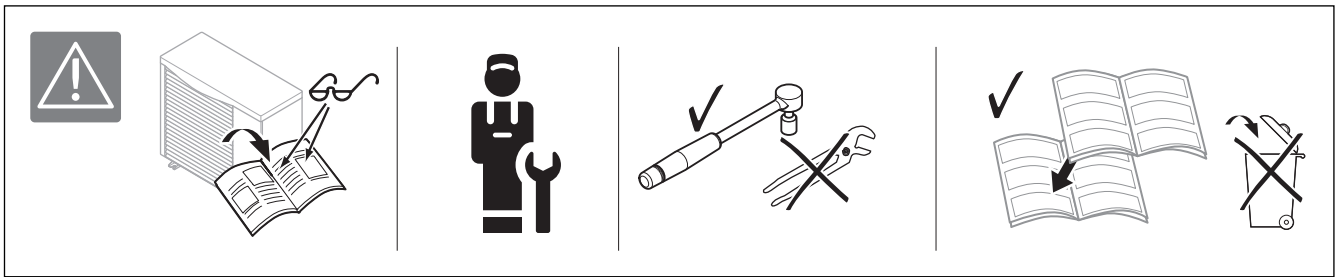









0020250225


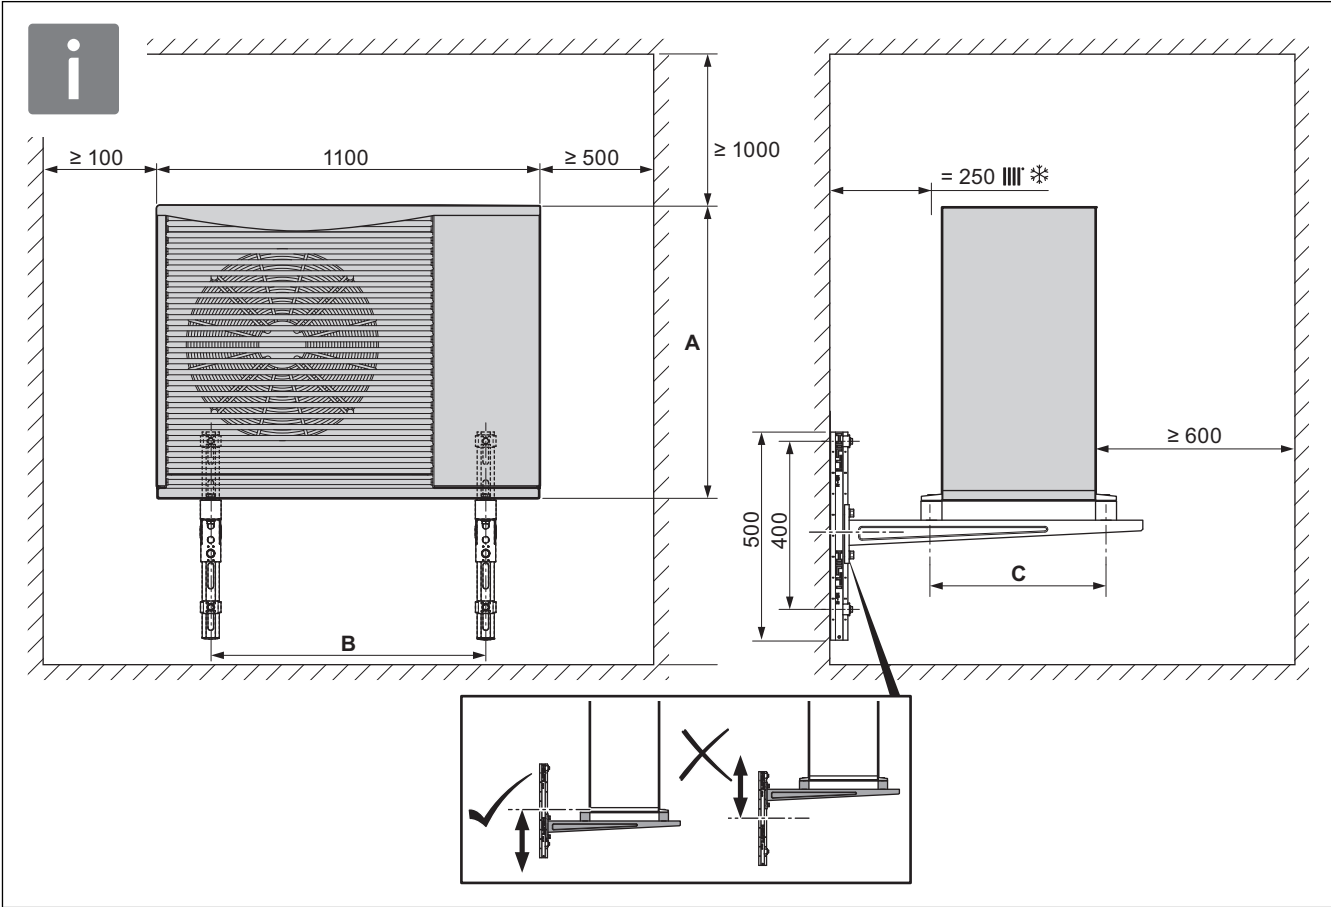




	EN 771	DIN 105	Hilti	max. kg	
	min. C16/20	min. C16/20			
	CL 12 G1 B 0,11 240 x 115 x 113 CS 12 G1 B 0,11 240 x 115 x 113	K12, 2DF & MZ12, 2DF	HRD-HR 10 x 140	173 kg	
			 x kg	≤ 173 kg	
	 www.hilti.group →  Info Shop  www.hilti.group				
	 HIT-HY 170				





				
A	mm	840	975	765, 965
B	mm	740	778	740
C	mm	386	437	477
 		#1	#2	#1

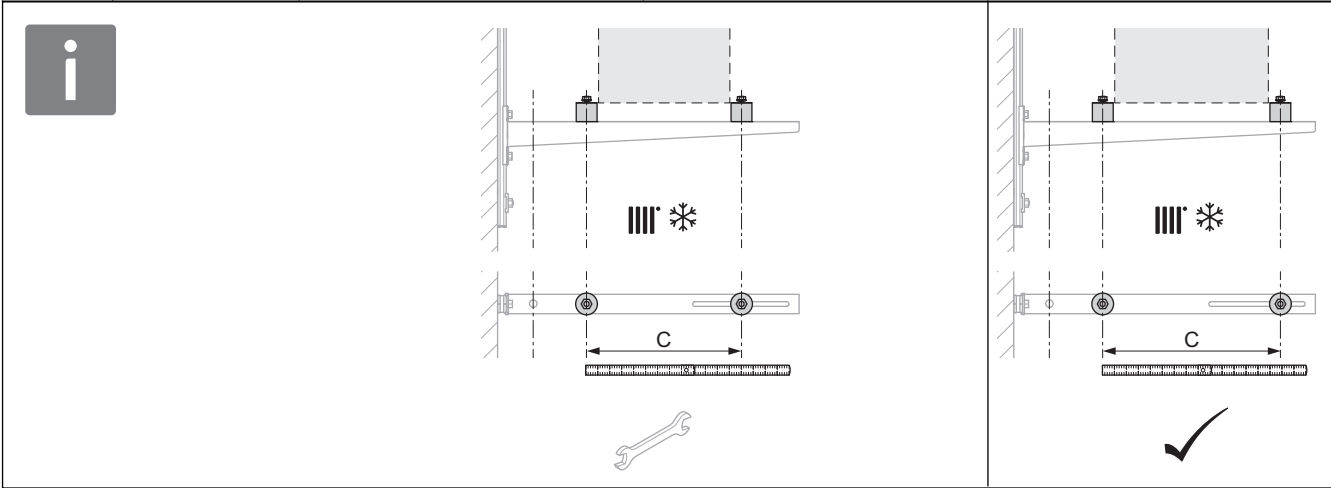

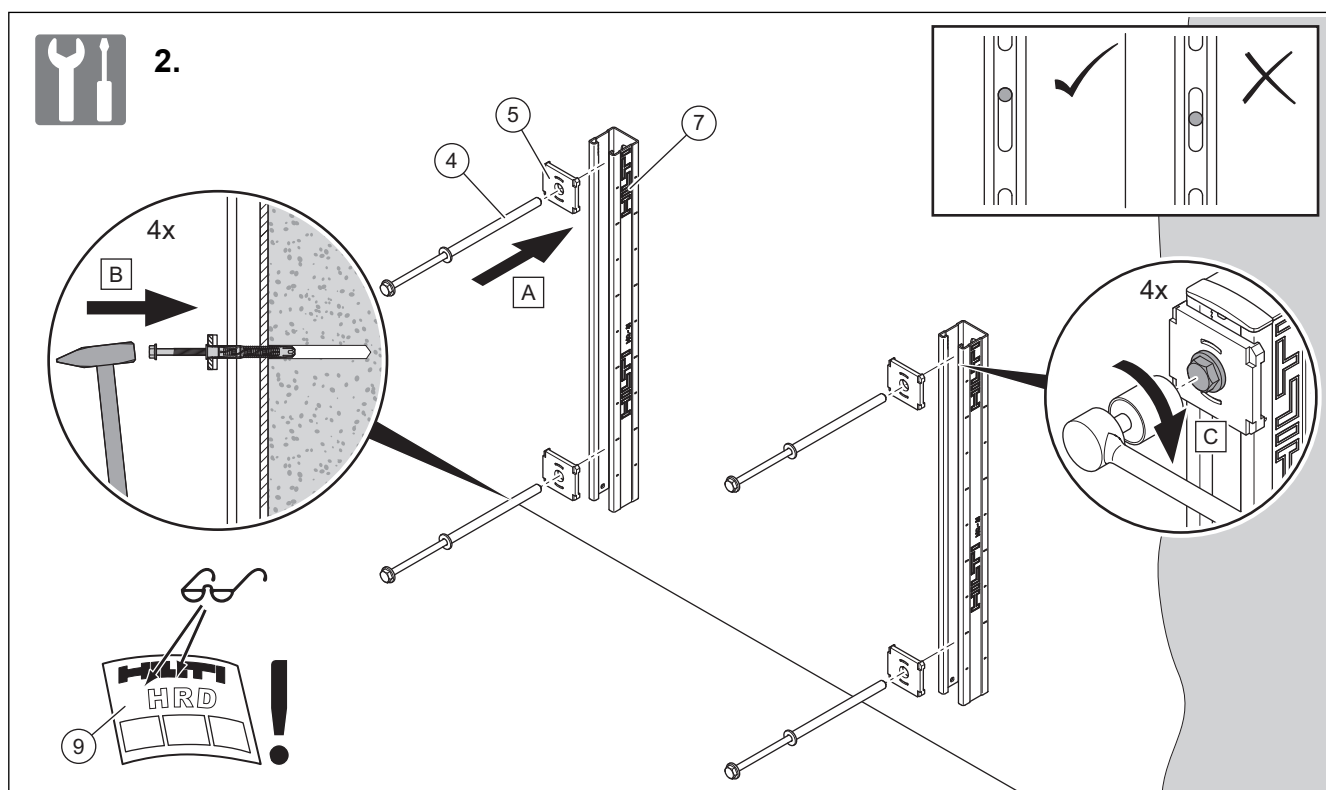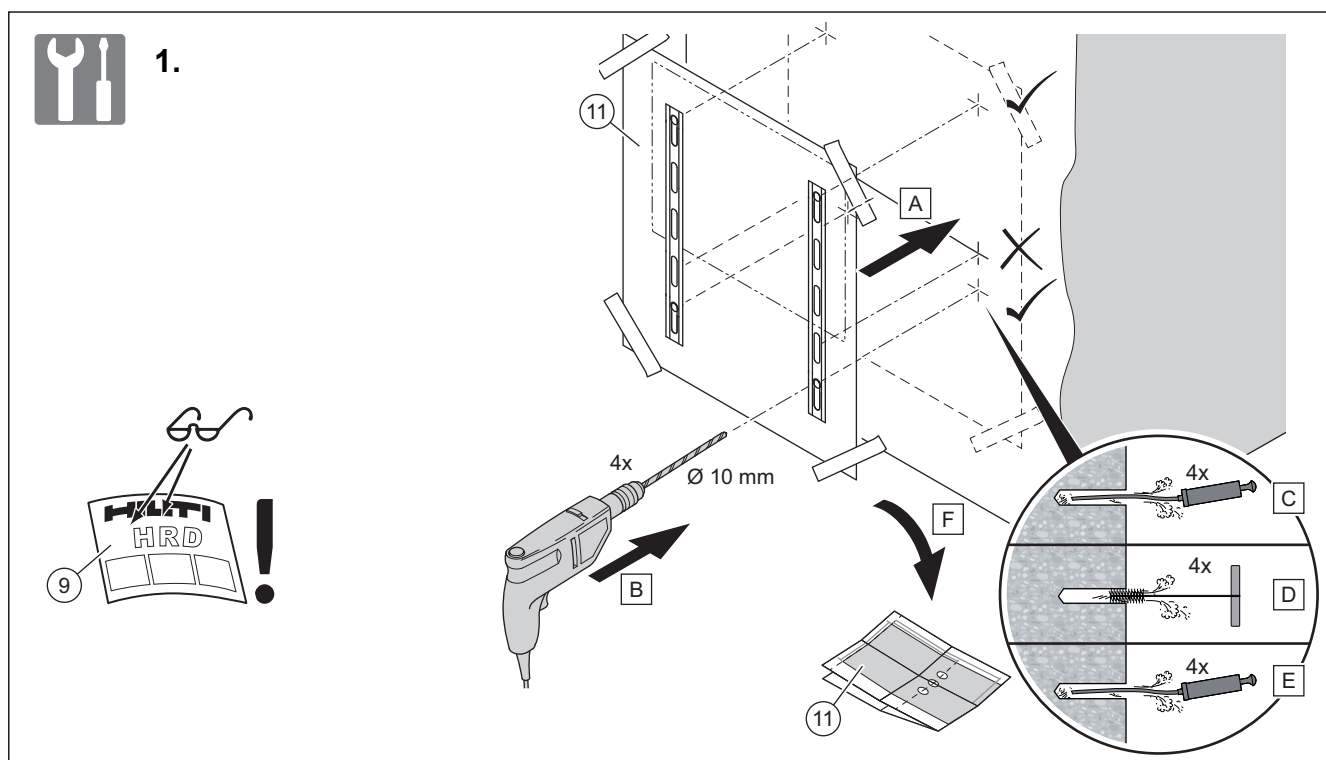

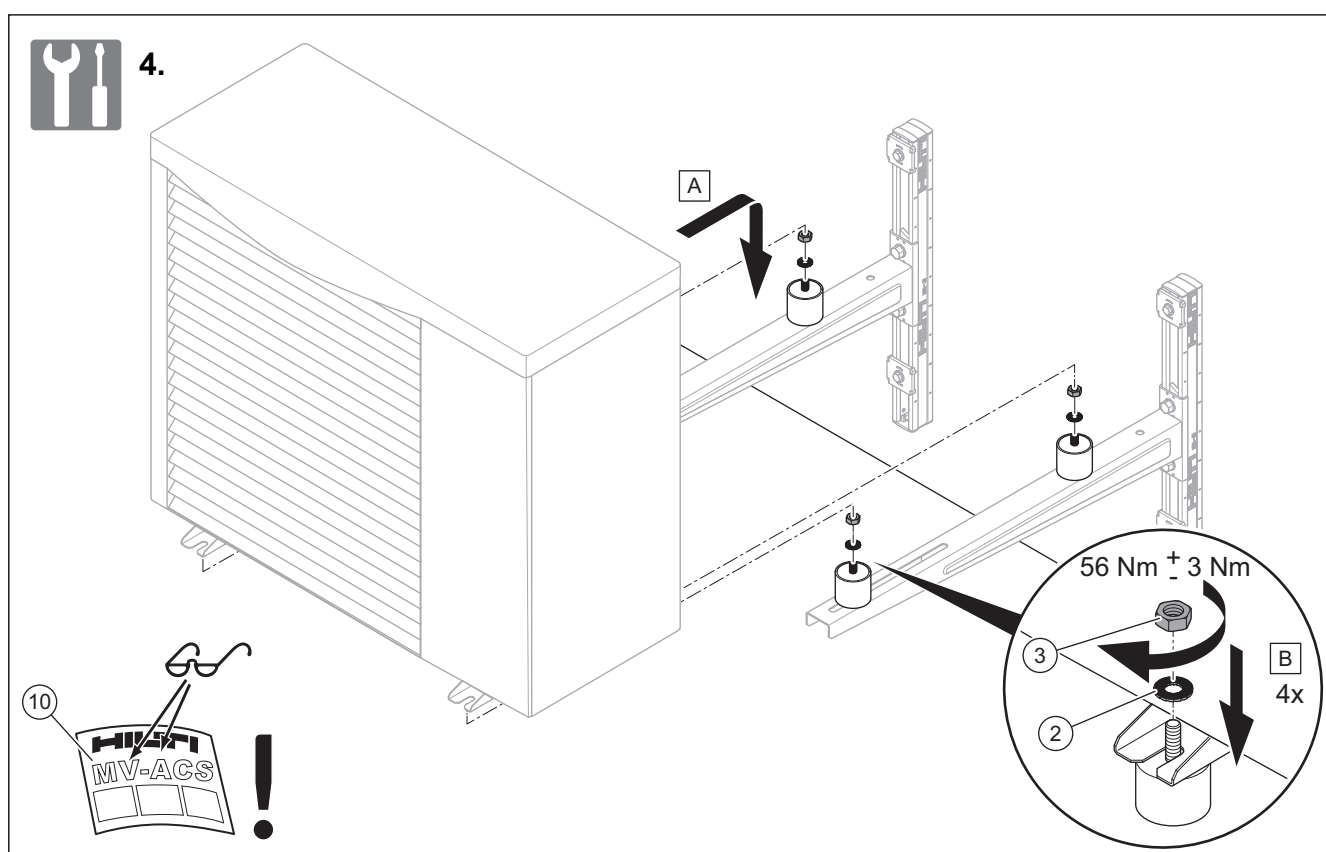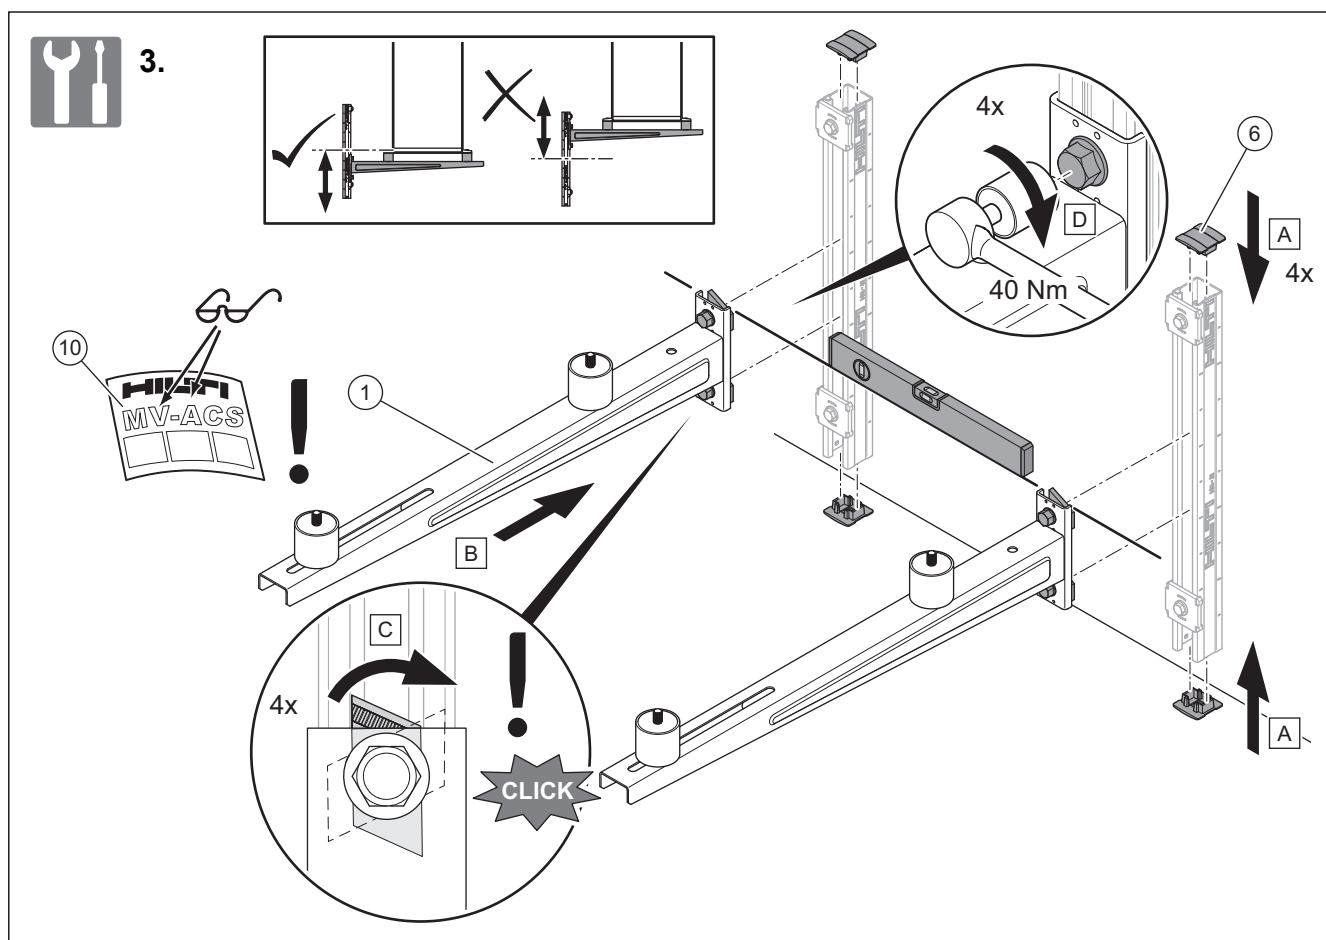

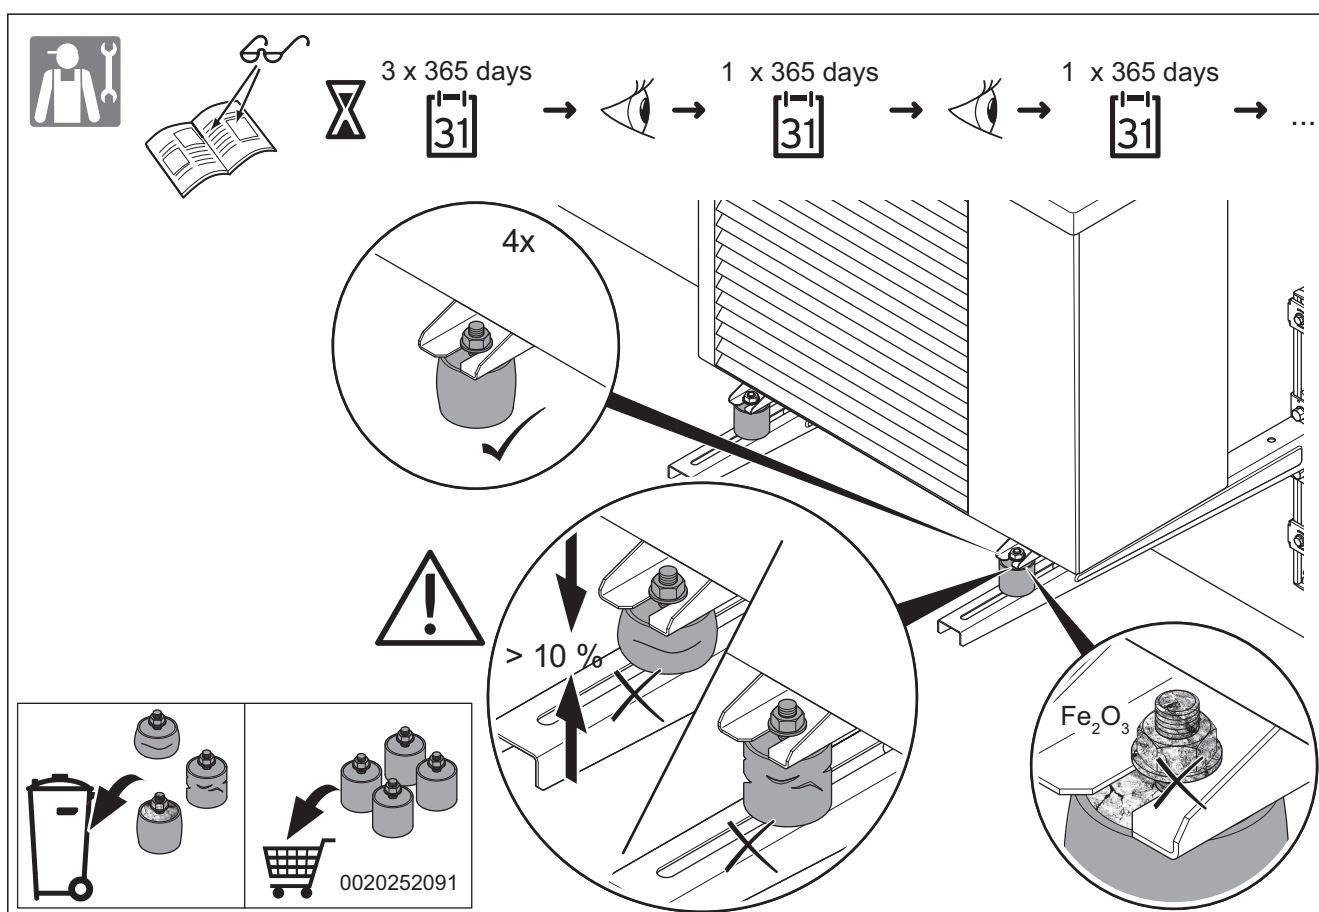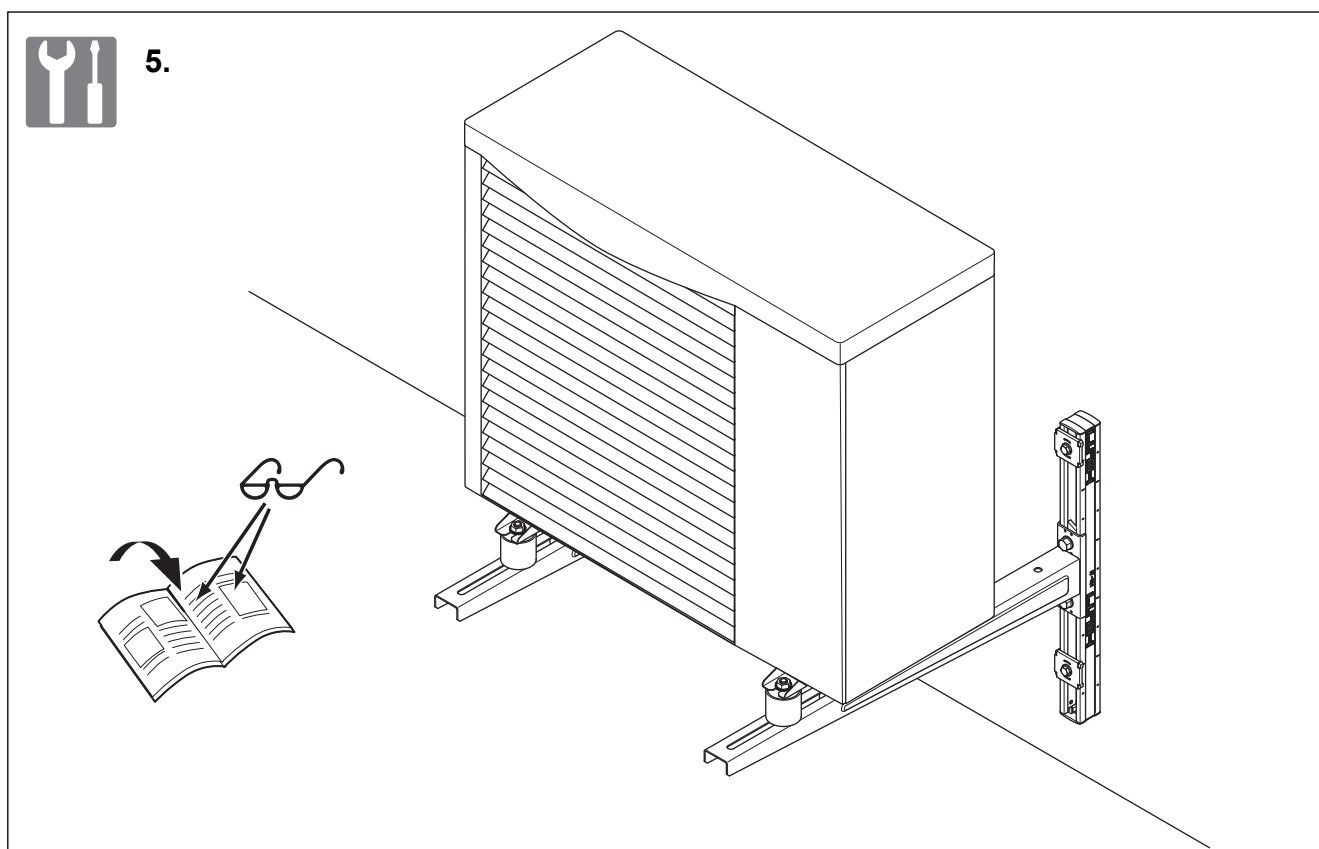



0020252044_04

Manufacturer
Vaillant GmbH

Berghauser Str. 40 ■ D-42859 Remscheid
Tel. +49 2191 18 0 ■ Fax +49 2191 18 2810
info@vaillant.de ■ www.vaillant.de

© These instructions, or parts thereof, are protected by copyright and may be reproduced or distributed only with the manufacturer's written consent.
Subject to technical modifications.

0020252044_04 INT 052021